

Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC





EU Type Examination Certificate

Date: 2019/07/23 n. 469193005/OE

Validity: 2024/07/22

The hereunder described items of Personal Protective Equipment have overcome positively the "EU type examination" (Module B), proving their conformity to the safety and health requirements of the Regulation (EU) 2016/425 (Annex II)

Manufacturer: (Responsible of the PPE)

SDE MOTORSPORT s.r.l.

via Giorgione, 5 – 31030 ALTIVOLE (TV) – ITALIA

Type of PPE:

motorcyclists' protective footwear

Category of PPE:

II: "medium" risks.

This certificate is based on reference standards listed below: its validity is no longer ensured should new version of the standards come into force.

Model

"Gravity FORC550"

col. BLACK/ORANGE (9916)

Description:



fastening system: by means of four black/white straps with adjustable hook made of polymeric material and a flap with Velcro closure in the external upper area of the bootleg;

processing: IDEAL;

sole: black vulcanized rubber "SUOLA U6186 CROSS GL22" (MF0237);

midsole: black rubber "MIRASOL C/2 MM4 CARDATA 2L" (MF0035);

upper: white leather "BYCAST 2.8 3.0 GR. MIURA OPACO" (PE0192):

internal bootlea: black split leather "CROSTE GROPPONI 2.2 ANTISTING." (PE0099A); external bootlea: black coated microfiber "ECO COSTO 020/16 30/10" (SI0207) cou<mark>ple</mark>d with white polymeric material covered with black non-woven fabric;

front joint: white coated synthetic material "COST0073/14 15/10VICEN BC0 SDE" (S10274) coupled with white and anthracite grey foam material and with black felt "FELTRO ART IBILINE 7041 ANTRA" (SI0292);

rear joint: white coated synthetic material "COST0073/14 15/10VICEN BC0 SDE" (SI0274) coupled with white and anthracite grey foam material and with black cordura fabric; quarter lining: black fabric "VELLUTINO 140GR P.I.+MTP3,5" coupled with grey foam material (FO0176);

bootleg and shinbone lining: black fabric "VELL VP 110" coupled with grey foam material (FO0175);

collar: black fabric "1340" declared cordura (AC0389) which includes foam material; vamp lining of the toe-end: black felt "FELTRO ART IBILINE 7041 ANTRA" (\$10292); rear joint lining: white knitting coated with black polymeric material "CANOVE 083/99 L9/10" (SI0161);

insole: cream color rigid polymeric material "SOTT.SAGOM.HIPER.H2T+LAMA" (MF0175); removable insock (perforated): grey foam material coupled with black non-woven fabric in contact with the foot "FSB ECONOMICO PE150" (MF0357);

gearshift lever protective insert: black polymeric material;

metallic insert of the toe-end; silver color kept attached to the boot by means of eight metal screws.

The boot also has the following inserts in polymeric material stitched to the upper:

- shin insert: black color with orange logo;
- heel insert: black color;
- calf insert: black color with orange logo;
- <u>lateral external insert</u>: orange color;
- lateral internal insert: black color marked "FORMA".





PRD N° 0230 B

Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC Signatory of EA, IAF and ILAC Mutual Recognition Agreements





EU Type Examination Certificate

Date: 2019/07/23 n. **469193005/OE**

Validity: 2024/07/22

		202 1/07/22
EN 13634:2017	Protective footwear test <mark>me</mark> thods	for motorcycle riders – Requirements and
use by motorcyclists for off-road and motocross activities		
fr <mark>om</mark> 32 to 41		
DC-11192		
RCT n°3812507		
Height of upper Impact abrasion resi Impact cut resistand Transverse rigidity of	istance of the upper ce of the upper the whole footwear	level 2 level 2 level 2 level 2
 CE Marking; name/Trademark c item designation (= pictogram to indic levels of performan date of production size indication; 	of the Manufacturer; = commercial name + alp cate the motorcycle use nce reached during labor n (month and year) + picto	ohanumeric code); e + nr./year of the reference Standard + catory tests; ogram instructing to read the User Manual;
	use by motorcyclists from 32 to 41 DC-11192 RCT n°3812507 Requirements accord Height of upper Impact abrasion res Impact cut resistand Transverse rigidity of NOTE: the Technical Staperformance. printed on a stitched - CE Marking; - name/Trademark of item designation (====================================	use by motorcyclists for off-road and motocro from 32 to 41 DC-11192 RCT n°3812507 Requirements according to EN 13634:2017: all Height of upper Impact abrasion resistance of the upper Impact cut resistance of the upper Impact cut resistance of the upper Transverse rigidity of the whole footwear NOTE: the Technical Standard provides 2 performance performance. printed on a stitched label and displaying the - CE Marking; - name/Trademark of the Manufacturer; - item designation (= commercial name + alp - pictogram to indicate the motorcycle use levels of performance reached during labor - date of production (month and year) + pict






EN 13634:2017 Level 2 - 2 - 2 - 2 Gravity FORC550





LOT#xxxx MM/YY

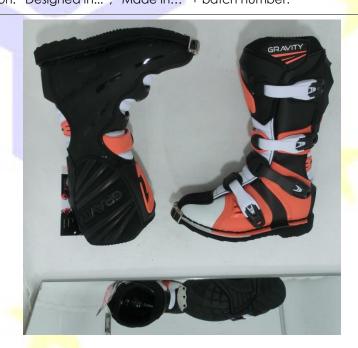

NOTE: the Technical File contains a more detailed description of the PPE (material, method of assembly, photographs or drawings), performance data, safety functions and level of protection, elements of conformity to the basic and supplementary requirements.

The Technical File is integral part of the present Certification, which has to be kept available by the applicant to be forwarded - upon request - to the entitled person (supervising body, Controlling Officer).